

## RADWIN D Plus Model

Point-to-Point Radio - Data Sheet (RW2000/ODU/DP/F54/ETSI/INT)



RW-2250-D100

### Product Description

RW-2250-D100 is a carrier-class radio that belongs to the RADWIN 2000 D-Plus Series and supports 5.4 to 5.8 GHz frequency range.

The Radio complies with ETSI regulations with a factory default of 5.4 GHz ETSI.

RW-2250-D100 delivers up to 750 Mbps throughput.

The radio comes with an integrated antenna.


### Product Highlights

- 750 Mbps Ethernet net throughput
- Long range - Up to 40 km / 25 miles
- Telco-grade, extremely robust in harsh conditions
- Supports intra-site and inter-site synchronization to maximize capacity
- Configurable asymmetric throughput
- Advanced OFDM & MIMO technologies for operation in nLOS/NLOS and dense radio environments

## Product Specifications:

Configuration					
Architecture	Outdoor Unit with an integrated antenna				
PoE to ODU Interface	Outdoor CAT-5e; Maximum cable length: 100m for 10/100BaseT and 75m for 1000BaseT				
Radio					
Max Capacity	750 Mbps net aggregate throughput				
Range	Up to 40 km / 25 miles *				
Channel Bandwidth	Configurable: 10, 20, 40, 80 MHz (for the default band)				
Modulation	MIMO-OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)				
Adaptive Modulation, Coding & Channel BW	Supported				
Automatic Channel Selection	Supported upon power up				
DFS	Supported (ETSI)				
Diversity	Supported				
Spectrum Viewer	Supported				
Max Tx Power	25 dBm per chain; max EIRP 30 dBm (for the default band)				
Duplex Technology	TDD				
Error Correction	FEC k = 1/2, 2/3, 3/4, 5/6				
Encryption	AES 128				
Uplink / Downlink Allocation	Configurable: Symmetric or Asymmetric				
QoS	Packet classification to 4 priority queues according to 802.1P or Diffserv				
VLAN Support	802.1Q, QinQ, 4094 VLANs				
TDD Intra Site Synchronization	Supported				
TDD Inter Site Synchronization	Supported through common GPS receiver per site				
Option 82	Supported				
RADIUS Authorization	Supported				
RADIUS User authentication	Supported				
Syslog	Supported				
Supported Bands					
Band	CBW 10MHz [GHz]	CBW 20MHz [GHz]	CBW 40MHz [GHz]	CBW 80MHz [GHz]	Radio Compliance
5.4 GHz ETSI (default)	5.475-5.705	5.470-5.710	5.490-5.690	5.490-5.650	ETSI EN 301 893
5.8 GHz ETSI	5.735-5.865	5.735-5.865	-	-	ETSI EN 302 502
Mechanical					
ODU Dimensions	30(w) x 30(h) x 10(d) cm				
ODU Weight	2.9 kg / 6.39 lbs				
Mounting Kit	Included				
Power					
Power Feeding	Power provided over ODU-IDU cable				
Power Consumption	<20W				
Network Device					
AC POE	RW-9921-400x				
DC POE	RW-9921-2069				
Environmental					
Operating Temperatures	-35°C to 60°C / -31°F to 140°F				
Humidity	100% condensing, IP67 (totally protected against dust and against immersion in water up to 1m)				
MTBF	hours (Telcordia SR332 @25°C)				
Wind Resistance operational	180Km/h				
Safety					
US/CAN (cTUVus)	UL 62368-1:2014, UL 60950-22:2017, CAN/CSA-C22.2 NO. 62368-1-14, CAN/CSA-C22.2 No. 60950-22:17				
EU/Intl	IEC 62368-1:2014, EN 62368-1:2014/A11:2017, IEC 60950-22:2016, EN 60950-22:2017				
EMC					
FCC	47 CFR, Part15, Subpart B, Class B				
ETSI	EN 300 386, EN 301 489-1, EN 301 489-4				
Canada	CISPR 22-2010 Class B				

Integrated Antenna	
Gain	23 dBi
Detailed Gain	22.5 +/- 1.0 dBi
VSWR	1.5 :1 (typ)
3 dB Azimuth Beamwidth	10 Deg. (Typ)
3 dB Elevation Beamwidth	Deg. (Typ)
Polarization	Dual Linear (Vertical and Horizontal)
Sidelobes Level	ESTI EN 302 326-3 V1.1.2 DN3
Cross Polarization	ESTI EN 302 326-3 V1.1.2 DN3
F/B Ratio	-30 dB
Port To Port Isolation	30 dB (max)
Lightning Protection	DC Grounded

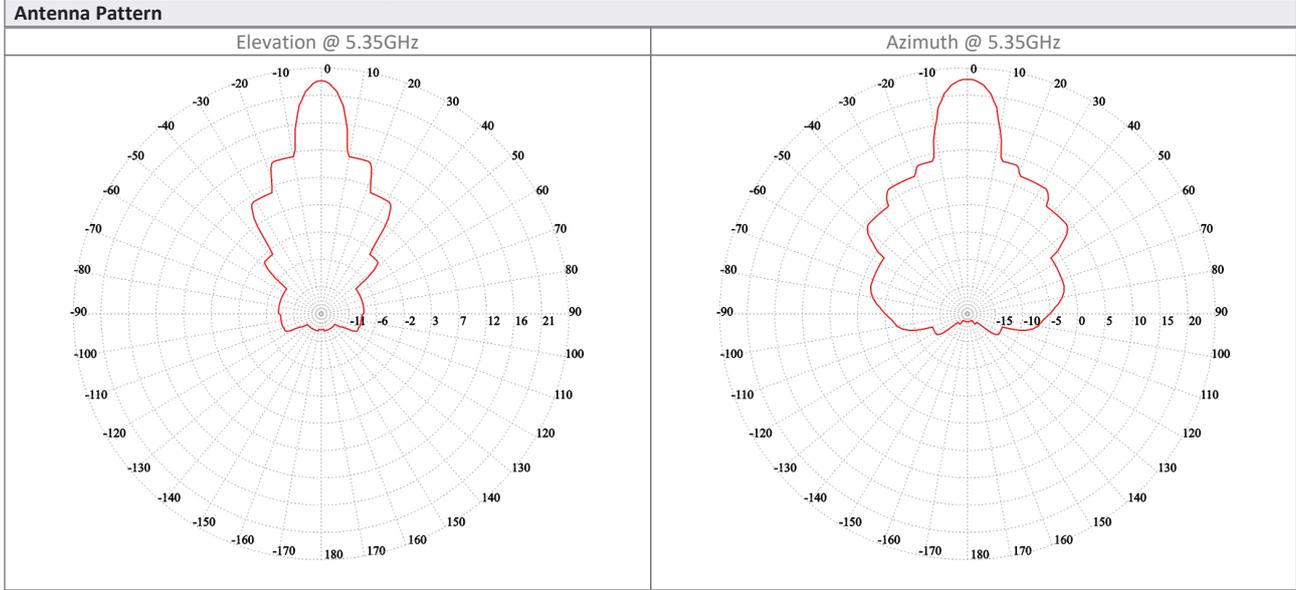

**Ordering Info**

**Part Number:** RW-2250-D100

**Description:** RADWIN D Plus ODU, with an integrated antenna, supporting multi frequency bands at 5.x GHz, factory default 5.4 GHz ETSI.

\* May be limited by regulation in the specific band being used

Datasheet information can be changed by manufacturer without prior notice