


# TSW304






## **HARDWARE**


## **FRONT VIEW**

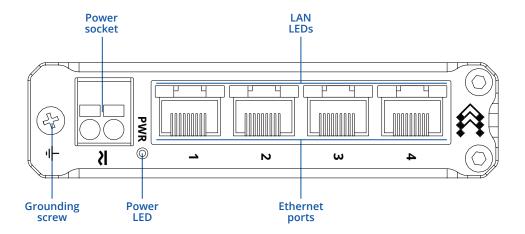


## **BACK VIEW**

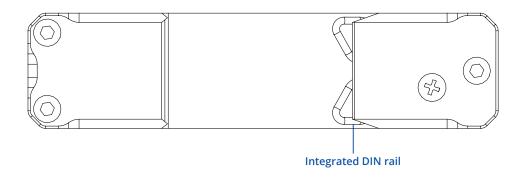

### **RJ45 LED MEANING**



## **POWER SOCKET PINOUT**





## **FEATURES**

## **ETHERNET**

LAN 4 x RJ45 ports, 10/100/1000 Mbps, compliance with IEEE 802.3, IEEE 802.3u, 802.3az standards, supports auto MDI/MDIX crossover

## PERFORMANCE SPECIFICATIONS

Bandwidth (Non-blocking)	8 Gbps
Packet buffer	128 KB
MAC address table size	2K entries
Jumbo frame support	9216 bytes

#### **POWER**

Connector	2-pin industrial power socket		
Input voltage range	7 - 57 VDC; 9-40 VAC		
PoE (passive)	Passive PoE. Possibility to power up through first LAN port, not compatible with IEEE802.3af, 802.3at and 802.3bt standards		
Power consumption	Idle: 0.26 W / Max: 1.44 W		

## PHYSICAL INTERFACES (PORTS, LEDS, ANTENNAS, BUTTONS, SIM)

Ethernet	4 x RJ45 ports, 10/100/1000 Mbps
Status LEDs	1 x Power LED, 8 x LAN status LEDs
Power	1 x 2-pin industrial power socket
Grounding	1 x Grounding screw

## PHYSICAL SPECIFICATION

Casing material	Anodized aluminum housing and panels		
Dimensions (W x H x D)	102 x 25 x 81.5 mm		
Weight	210 g		
Mounting options	Integrated DIN rail bracket, flat surface placement		

## **OPERATING ENVIRONMENT**

Operating temperature	-40 °C to +75 °C
Operating humidity	10 % to 90 % non condensing
Ingress Protection Rating	IP30


## **CERTIFICATION & APPROVALS**

Regulatory	CE, REACH, ROHS, WEEE, UKCA, FCC, IC, CB, RCM
SAFETY	
Standards	EN IEC 62368-1:2020+A11:2020



# HARDWARE INSTALLATION

- 1. Connect your main internet router/modem to TSW304.
- 2. Connect end devices to TSW304 1 to 4 port.
- **3.** Connect 2 pin power plug to TSW304 to power up switch.

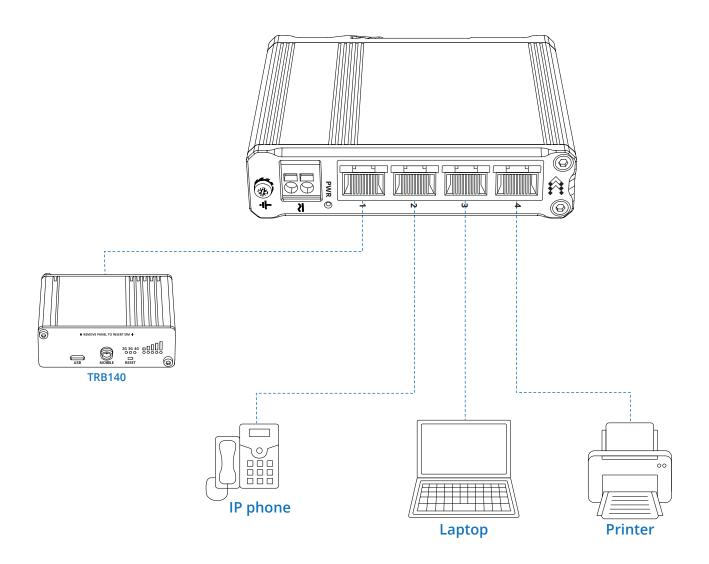

## **TECHNICAL INFORMATION**

Technical specifications		
Input voltage range	7 – 57 VDC; 9-40 VAC	
Max power consumption	1.44 W	



## WHAT'S IN THE BOX?

## STANDARD PACKAGE CONTAINS

- TSW304
- QSG (Quick Start Guide)
- Packaging box







# **STANDARD ORDER CODES**

TSW304 000000	851762	8517.62.00	Standard package
PRODUCT CODE	HS CODE	HTS CODE	PACKAGE CONTAINS

For more information on all available packaging options – please contact us directly.



## TSW304 SPATIAL MEASUREMENTS & WEIGHT


#### **MAIN MEASUREMENTS**

W x H x D dimensions for TSW304:

Device housing\*: 102 x 25 x 81.5 mm Box: 173 x 71 x 148 mm


#### **TOP VIEW**

The figure below depicts the measurements of TSW304 and its components as seen from the top:

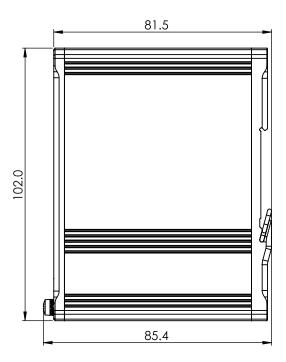

## **RIGHT VIEW**


The figure below depicts the measurements of TSW304 and its components as seen from the right side:  $\frac{1}{2} \left( \frac{1}{2} \right) = \frac{1}{2} \left( \frac{1}{2} \right) \left( \frac{1}$ 

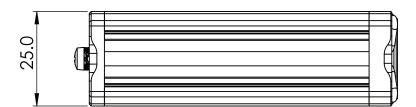




## **FRONT VIEW**

The figure below depicts the measurements of TSW304 and its components as seen from the front panel side:  $\frac{1}{2} \left( \frac{1}{2} \right) = \frac{1}{2} \left( \frac{1}{2} \right) \left$ 

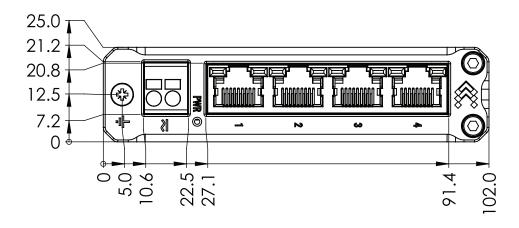

## **REAR VIEW**


The figure below depicts the measurements of TSW101 and its components as seen from the back panel side:  $\frac{1}{2} \left( \frac{1}{2} \right) = \frac{1}{2} \left( \frac{1}{2} \right) \left($ 

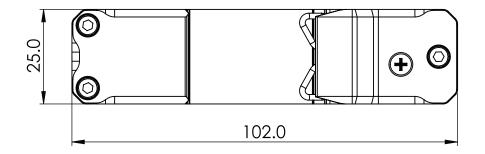



## MOUNTING SPACE REQUIREMENTS

The figure below depicts an approximation of the device's dimensions when cables and antennas are attached:

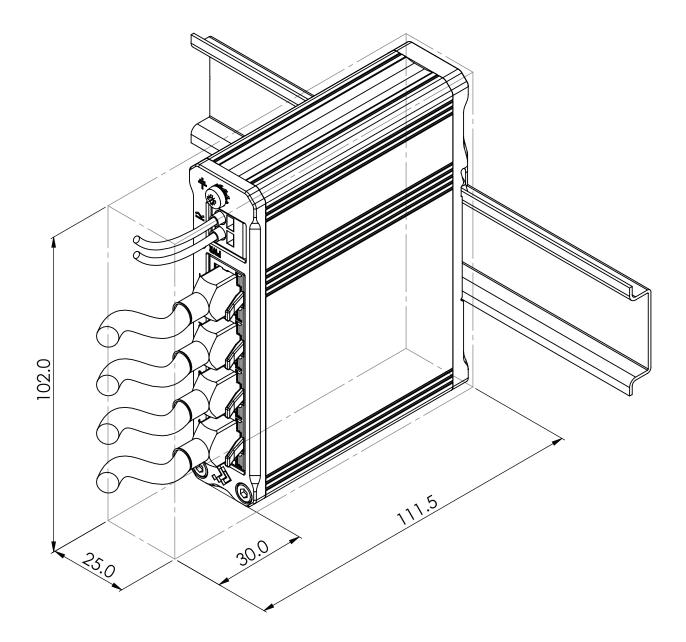



## DIN RAIL

The scheme below depicts protrusion measurements of an attached DIN Rail:

